

Product Type: **Modular Push**  
 Product Code: **E180442**  
 Product Name: **Estetiche per versione push termostatica**  
**Trim set for thermostat push version**



Description: estetica termostatica push rosoni tondi maniglie tonde 2 vie -  
 2-way thermostat push round rosettes and round handles trim set

Dimensions: rosoni | rosettes 70 mm  
 Material: acciaio 316 | 316 stainless steel

Notes: da abbinare con **E176908** incasso termostatico Push 2 vie orizzontale e **E176916** incasso termostatico Push 2 vie verticale  
 to go with **E176908** 2-way Push horizontal concealed module and **E176916** 2-way Push vertical concealed module  
 flessibile\* con attacco speciale, non possono essere installati flessibili con attacco standard  
 flexible hose\* with special connection. Hoses with standard connection cannot be installed

Functions:



2 Way



Push  
thermostat

Finishes:



Stainless Steel  
**AISI 316**



Copper  
**C0316**



High Brass  
**HB316**




Gun Metal  
**GM316**



Absolute  
Black **AB316**

**316 Brushed PVD**

## DIMENSIONS

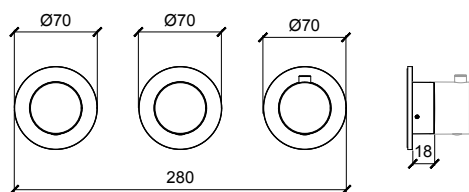

## FLOWRATE

<b>E176908</b>		
PRESSURE BAR	FLOW RATE L/min	
	EXIT 1	EXIT 2
0.5	8	7.5
1	12.2	11.7
2	17.6	17.2
3	21.7	21.2
4	25	24.5
5	28	27.3

<b>E176916</b>		
PRESSURE BAR	FLOW RATE L/min	
	EXIT 1	EXIT 2
0.5	8	7.5
1	12.2	11.7
2	17.6	17.2
3	21.7	21.2
4	25	24.5
5	28	27.3

## CURA DEL PRODOTTO

Per evitare danni al vostro bagno o all'apparecchiatura acquistata vi invitiamo ad osservare le seguenti raccomandazioni di utilizzo:

- Spurgare l'impianto prima di collegare l'apparecchio.
- Pulire periodicamente la fessura di erogazione acqua da eventuali depositi di calcare che potrebbero compromettere il corretto funzionamento.

**Consiglio:** L'installazione di un impianto di filtraggio e addolcitura delle acque migliora e prolunga la vita dei nostri apparecchi e dell'impianto stesso.

### PULIZIA PARTI METALLICHE:

Per la semplice pulizia delle parti metalliche del prodotto è sufficiente usare un panno morbido e inumidito con acqua e sapone o un prodotto anticalcare.

Per evitare la formazione di macchie, dovute alla presenza di calcio nell'acqua, si consiglia di asciugare con un panno dopo ogni uso.

Consiglio: Si prega di usare solo detergenti naturali a base di sapone evitando quelli contenenti alcool, acido cloridrico o acido fosforico, candeggina, cloro, ecc., e quelli contenenti polveri abrasive.

## PRODUCT CARE

*To avoid damages to the purchased equipment, please observe the following recommendations for use:*

- *Clean the plumbing before connecting the device.*
- *Periodically clean the water blade to avoid any limestone deposits that could compromise the good functioning.*

**Advice:** *The installation of a filter and water-softener system improves and extends the life of the devices and of the plant itself.*

### CLEANING OF METAL PARTS:

*For an easy cleaning of the metal parts of the product, simply use a soft cloth moistened in water and soap or an anti-limestone detergent.*

*To avoid spots caused by calcium in water, we advise drying with a cloth after each use.*

**Advice:** *Please use only natural soap-based detergents avoiding those with alcohol, hydrochloric acid or phosphoric acid, bleach, chlorine etc. and those containing abrasive powders.*

## PACKING



1

## PRODOTTI CORRELATI | RELATED PRODUCTS



### E176908

Incasso termostatico Push 2 vie orizzontale

### E176908

2-Way Push Horizontal Concealed Module



### E176916

Incasso termostatico Push 2 vie verticale

### E176916

2-Way Push Vertical Concealed Module